

-1-

Date: _____ Express Mail Label No. _____

Inventors: David M. Thompson, Cynthia A. Hoover,
John D. Peck and Michael M. Litwin
Attorney's Docket No.: D-21267

DEPOSITION PROCESSES USING GROUP 8 (VIII) METALLOCENE
PRECURSORS

RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 60/422,946, filed October 31, 2002; U.S. Provisional Application No. 60/422,947, filed October 31, 2002; U.S. Provisional Application No. 60/426,284, filed November 14, 2002; U.S. Provisional Application No. 60/427,461, filed November 18, 2002; U.S. Provisional Application No. 60/446,320, filed February 7, 2003; U.S. Provisional Application No. 60/453,718, filed April 18, 2003; U.S. Provisional Application No. 60/453,719, filed April 18, 2003; and U.S. Provisional Application No. 60/453,717, filed April 18, 2003. The entire teachings of the above-referenced applications are incorporated herein by reference.

BACKGROUND OF THE INVENTION

Chemical vapor deposition (CVD) methods are employed to form films of material on substrates such as wafers or other surfaces during the manufacture or processing of semiconductors. In CVD, a CVD precursor, also known as a CVD chemical compound, is decomposed thermally, chemically, photochemically or by plasma activation, to form a thin film having a desired composition. For instance, a vapor phase CVD precursor can be contacted with a substrate that is heated to a temperature higher than the decomposition temperature of the precursor, to form a

metal or metal oxide film on the substrate.

Thin films that include ruthenium (Ru), ruthenium oxide (RuO₂) or iron (Fe) have good electrical conductivity, high work function, are chemically and thermally stable, resistant to inter-layer chemical diffusion and are compatible with many dielectric substrate materials. Ru and RuO₂ films, for instance, have been investigated as film electrode material for semiconductor devices such as DRAM (Dynamic Random Access Memory) devices.

Examples of films produced from ruthenium-based precursors are described in: U.S. Patent No. 6,440,495 issued on August 27, 2002, to Wade, *et al.*; U.S. Patent No. 6,074,945 issued on June 13, 2000, to Vaartstra, *et al.*; U.S. Patent Application Publication 2002/0102826, published on August 1, 2002, with the title *Fabricating Method of Semiconductor Integrated Circuits*; J. Peck, *et al.*; *Chemical Vapor Deposition of Novel Precursors for Advanced Capacitor Electrodes*, Proceedings of the Symposium, Rapid Thermal and Other Short-Time Processing Technologies III, Electronics, Dielectric Science and Technology, and High Temperature Materials Divisions, Proceedings Volume 2002-11 pp.235-242, 201st Electrochemical Society Meeting held in Philadelphia. The entire teachings of the above-referenced patents, published patent application and paper for meeting presentation are incorporated herein by reference.

Bis(*pentahaptocyclopentadienyl*)ruthenium (ruthenocene) and the symmetrical, diethyl-substituted ruthenocene (1,1'-diethylruthenocene) have been investigated as possible precursors for forming ruthenium-based thin films by CVD techniques.

These compounds have been prepared by several synthetic routes.

One existing method for forming ruthenocene includes the reaction of RuCl₃·XH₂O with cyclopentadiene, in the presence of Zn, to produce ruthenocene, ZnCl₂ and HCl, as shown in Fig. 1A. A similar approach, using ethyl-substituted cyclopentadiene, has been employed to produce 1,1'-diethylruthenocene, as shown in Fig. 1B. Generally, yields obtained by this method are about 70%.

As shown in Fig. 1C, unsubstituted ruthenocene also has been prepared by the reaction of cyclopentadiene,

chloro(cyclopentadienyl)bis(triphenylphosphine)ruthenium(II) and sodium hydride (NaH) in benzene. Chloro(cyclopentadienyl)bis(triphenylphosphine)ruthenium(II) precursor has been synthesized by reacting ruthenium trichloride and triphenylphosphine in ethanol.

- 5 Another method that has been investigated for the synthesis of ruthenocene includes the transmetallation reactions of a bis(alkylcyclopentadienyl)iron compound with $\text{RuCl}_3 \cdot \text{XH}_2\text{O}$ and results in the formation of low yield 1,1'-dialkylruthenocene, iron trichloride (FeCl_3) and difficult to separate iron species.

- 10 Monosubstituted ruthenocenes, e.g., 1-ethylruthenocene, are formed as an impurity during the synthesis of 1,1'-diethylruthenocene. Tert-butyl(cyclopentadienyl)(cyclopentadienyl)ruthenium also has been prepared by reacting a heated mixture of bis (cyclopentadienyl)ruthenium, aluminum chloride and polyphosphoric acid, with tert-butyl alcohol, followed by distillation.

- 15 Generally, synthetic methods described above often are associated with low yields, competing dimerization reactions, complex product separations, special handling techniques of dangerous reagents, e.g., NaH. Furthermore, as seen in Figs. 1A and 1B, these synthetic approaches include a one step addition of both cyclopentadienyl rings and thus are suitable for preparing unsubstituted ruthenocene or the symmetrically substituted 1,1'-diethylruthenocene. Both ruthenocene and 1,1'-diethylruthenocene, 20 have relatively low vapor pressure (less than 10 Torr at 100°C). At room temperature, ruthenocene is a solid and 1,1'-diethyl-ruthenocene is a liquid.

- 25 Generally, more volatile CVD precursors are preferred, as are precursors that are liquid at room temperature, rather than solid. In addition, desired CVD precursors also are heat decomposable and capable of producing uniform films under suitable CVD conditions.

Therefore, a need exists for the continued investigation of ruthenium-based CVD precursors and for new film deposition processes. A need also exists for methods for producing films that include ruthenium or other Group 8 (VIII) metals.

SUMMARY OF THE INVENTION

The invention generally is related to a deposition process to produce a material, such as, for example, a film, coating or powder, that includes a Group 8 (VIII) metal and/or Group 8 (VIII) metal oxide. The process includes decomposing at least one

5 asymmetrically substituted metallocene precursor, thereby forming the material. The asymmetrically substituted metallocene precursor is represented by the general formula C_pMCp' , where M is a metal selected from the group consisting of ruthenium (Ru), osmium (Os) and iron (Fe); Cp is a first substituted cyclopentadienyl or cyclopentadienyl-like (e.g., indenyl) moiety that includes at least one substituent group

10 D_1 ; and Cp' is a second substituted cyclopentadienyl or cyclopentadienyl-like moiety (e.g., indenyl) that includes at least one substituent group D_1' . D_1 and D_1' are different from each other and are independently selected from the group consisting of:

X;

$C_{a1}H_{b1}X_{c1}$;

15 $C_{a2}H_{b2}X_{c2}(C=O)C_{a1}H_{b1}X_{c1}$;

$C_{a2}H_{b2}X_{c2}OC_{a1}H_{b1}X_{c1}$;

$C_{a2}H_{b2}X_{c2}(C=O)OC_{a1}H_{b1}X_{c1}$; and

$C_{a2}H_{b2}X_{c2}O(C=O)C_{a1}H_{b1}X_{c1}$;

where

20 X is a halogen atom or nitro group (NO_2);

a1 is an integer from 1 to 8;

b1 is an integer from 0 to $2(a1)+1-c1$;

c1 is an integer from 0 to $2(a1)+1-b1$;

b1 + c1 is at least 1;

25 a2 is an integer from 0 to 8;

b2 is an integer from 0 to $2(a2)+1-c2$;

c2 is an integer from 0 to $2(a2)+1-b2$.

In one embodiment, the invention is directed to a process for depositing a film. The process includes the step of decomposing vapor of an asymmetric metallocene or

30 metallocene-like compound, wherein decomposition is thermal, chemical,

photochemical or by plasma activation and the metallocene or metallocene-like compound has the general formula C_pMCp' , described above, thereby forming the film on a substrate.

In preferred embodiments, D_1 is:

5 X;
 $C_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}(C=O)C_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}OC_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}(C=O)OC_{a1}H_{b1}X_{c1}$; or
 10 $C_{a2}H_{b2}X_{c2}O(C=O)C_{a1}H_{b1}X_{c1}$;

where

X is fluorine (F), chlorine (Cl), bromine (Br), iodine (I) or (NO_2) ;
 a_1 is an integer from 2 to 8;
 b_1 is an integer from 0 to $2(a_1)+1-c_1$;
 15 c_1 is an integer from 0 to $2(a_1)+1-b_1$;
 $b_1 + c_1$ is at least 1;
 a_2 is an integer from 0 to 8;
 b_2 is an integer from 0 to $2(a_2) + 1 - c_2$;
 c_2 is an integer from 0 to $2(a_2) + 1 - b_2$, and

20 D_1' is:

 X;
 $C_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}(C=O)C_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}OC_{a1}H_{b1}X_{c1}$;
 25 $C_{a2}H_{b2}X_{c2}(C=O)OC_{a1}H_{b1}X_{c1}$; or
 $C_{a2}H_{b2}X_{c2}O(C=O)C_{a1}H_{b1}X_{c1}$;

where

X is F, Cl, Br, I or NO_2 ;
 a_1 is an integer from 1 to 8;
 30 b_1 is an integer from 0 to $2(a_1)+1-c_1$;

c1 is an integer from 0 to $2(a1)+1 - b1$;
b1 + c1 is at least 1;
a2 is an integer from 0 to 8;
b2 is an integer from 0 to $2(a2) + 1 - c2$;
5 c2 is an integer from 0 to $2(a2) + 1 - b2$.

One specific example of a metallocene compound employed in the process of the invention is 1-methyl,1'-ethylruthenocene.

At least one of Cp or Cp' can include one or more additional substituents, e.g., D₂, D₃, D₄, D₅, D₂', D₃', D₄', and D₅'.

10 The compounds described above provide additional options and flexibility to existing methods for producing Ru-, Os-, or Fe-based thin films by CVD. Some of these compounds, for example, are liquid at room temperature and have higher vapor pressure than conventional precursors. It has been found, for instance, that 1-methyl,1'-ethylruthenocene has a higher vapor pressure than 1,1'-diethylruthenocene. Higher
15 vapor pressure presents economic advantages such as increased productivity and lower film manufacturing costs. Functionalization of the cyclopentadienyl rings in the compounds of the invention is believed to modify properties such as solubility, vapor pressure, decomposition, combustion and other reaction pathways, reduction/oxidation potentials, geometry, preferred orientations and electron density distribution through
20 modification of the cyclopentadienyl rings. Thus a specific precursor can be selected for a desired application. Except for hydrogen and carbon, many of the precursors described herein, such as, for instance, alkyl-substituted metallocenes, do not include extraneous atoms and thus materials formed by their decomposition generally are free from impurities. In some other cases, the presence of oxygen atoms in the organic
25 substituent groups may favor the formation of metal oxide films, coatings or powders.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1A depicts a prior art synthetic route for forming unsubstituted ruthenocene.

Fig. 1B depicts a prior art synthetic route for forming 1,1'-diethylruthenocene.

30 Fig. 1C depicts another prior art method that has been used to form

unsubstituted ruthenocene.

Fig. 2A shows the molecular formula of a metallocene in a staggered conformation.

Fig. 2B shows the molecular formula of a metallocene in an eclipsed conformation.

Fig. 3 shows the structural formula of a disubstituted metallocene compound.

Fig. 4 shows a generalized structural formula of a metallocene that can be employed in the process of the invention.

Fig. 5 shows illustrative asymmetric ruthenocene compounds.

Fig. 6 depicts a synthetic method that can be employed to form a metallocene precursor that can be employed in the process of the invention.

Fig. 7. shows a synthetic method that can be employed to form 1-methyl,1'-ethylruthenocene.

Fig. 8 is a schematic diagram that depicts a thin film deposition system that can be employed to conduct one embodiment of the process of the invention.

Fig. 9 is a schematic diagram of an apparatus that can be employed to vaporize liquid or solid precursors, in a gas blending manifold for the chemical vapor deposition of a film.

Fig. 10 is a schematic diagram of a thin film deposition reactor that can be employed to conduct an embodiment of the invention.

Figs. 11 and 12 are scanning electron micrographs showing cross-sectional images of a ruthenium film produced by the process of the invention.

Fig. 13 is an energy dispersive spectrum of a ruthenium film produced on a SiO₂/Si substrate employing the process of the invention.

Fig. 14 is a plot of the measured sheet resistance as a function of vaporizer temperature for a film deposited using a 1-methyl,1'-ethylruthenocene precursor and a film deposited using 1,1'-diethylruthenocene.

Fig. 15 is a plot of thickness of films deposited from 1-methyl,1'-ethylruthenocene precursor, in comparison with films deposited from 1,1'-diethylruthenocene, as a function of vaporizer temperature.

Fig. 16 is a plot of resistivity of films deposited using a 1-methyl,1'-ethylruthenocene precursor and 1,1'-diethylruthenocene as a function of vaporizer temperature.

5 DETAILED DESCRIPTION OF THE INVENTION

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings in which like reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead being placed upon illustrating the principles of the invention.

The invention generally is related to a process for producing a film, coating or powder. The process includes the step of decomposing at least one asymmetrically substituted Group 8 (VIII) metallocene compound, further described below. As used herein the term "metallocene" refers to an organometallic coordination compound having a sandwich-type structure similar to that of ferrocene, in which a transition metal is believe to be π -bonded (electrons are moving in orbitals extending above and below the ring) to η^n -coordinated cyclic, generally aromatic moieties, Cp and Cp', where n indicates the number of carbon atoms in the cyclic moiety that are bonded to the transition metal.

In preferred embodiments, both Cp and Cp' are independently selected to be cyclopentadienyl or indenyl (a fused phenyl and cyclopentadienyl ring). If all carbon atoms in the cyclopentadienyl ring participate in bonding to the transition metal, these moieties are described as η^5 -coordinated. Thus a complete description of ferrocene would be $(\eta^5\text{-C}_5\text{H}_5)_2\text{Fe}$.

Shown in Fig 2A is a staggered conformation of a metallocene, where M is a Group 8 (VIII) metal, e.g., ruthenium, osmium or iron. Metallocenes also can have an eclipsed conformation, as shown in Fig. 2B. As used herein, molecular formulae are not intended to depict a particular metallocene conformation.

η^n -coordinated moieties other than cyclopentadienyl are referred to herein as

“cyclopentadienyl-like”. Additional counterion groups may be present in such compounds to balance electrical charges and form neutral molecules, as known in the art.

The metallocene compounds employed in the process of the invention have the general formula CpMCp' , where M is Ru, Os or Fe and where Cp and Cp' are cyclopentadienyl or cyclopentadienyl-like, e.g., indenyl, moieties. Each of Cp and Cp' is substituted and Cp is different from Cp'.

More specifically, in each of the Cp and Cp' moiety, at least one hydrogen (H) atom is replaced by a substituent group, D_1 and D_1' , respectively.

D_1 and D_1' are different from each other and are independently selected from the group consisting of:

X;

$\text{C}_{a1}\text{H}_{b1}\text{X}_{c1}$;

$\text{C}_{a2}\text{H}_{b2}\text{X}_{c2}(\text{C}=\text{O})\text{C}_{a1}\text{H}_{b1}\text{X}_{c1}$;

$\text{C}_{a2}\text{H}_{b2}\text{X}_{c2}\text{OC}_{a1}\text{H}_{b1}\text{X}_{c1}$;

$\text{C}_{a2}\text{H}_{b2}\text{X}_{c2}(\text{C}=\text{O})\text{OC}_{a1}\text{H}_{b1}\text{X}_{c1}$; and

$\text{C}_{a2}\text{H}_{b2}\text{X}_{c2}\text{O}(\text{C}=\text{O})\text{C}_{a1}\text{H}_{b1}\text{X}_{c1}$;

where

X is a halogen atom or nitro group (NO_2);

a1 is an integer from 1 to 8;

b1 is an integer from 0 to $2(a1)+1-c1$;

c1 is an integer from 0 to $2(a1)+1-b1$;

$b1 + c1$ is at least 1;

a2 is an integer from 0 to 8;

b2 is an integer from 0 to $2(a2) + 1 - c2$;

c2 is an integer from 0 to $2(a2) + 1 - b2$.

As used herein, integer ranges are inclusive. Straight as well as branched substituent groups D_1 and D_1' can be employed. For example, D_1 and/or D_1' can be a straight or branched C1-C8 alkyl group.

In one embodiment of the invention, D_1 is:

X ;
 $C_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}(C=O)C_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}OC_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}(C=O)OC_{a1}H_{b1}X_{c1}$; and
 $C_{a2}H_{b2}X_{c2}O(C=O)C_{a1}H_{b1}X_{c1}$;

5

where

X is a halogen atom e.g., fluorine (F), chlorine (Cl), bromine (Br) or iodine (I);

10

$a1$ is an integer from 2 to 8;

$b1$ is an integer from 0 to $2(a1)+1 - c1$

$c1$ is an integer from 0 to $2(a1)+1 - b1$;

$b1 + c1$ is at least 1;

$a2$ is an integer from 0 to 8;

15

$b2$ is an integer from 0 to $2(a2) + 1 - c2$;

$c2$ is an integer from 0 to $2(a2) + 1 - b2$; and

D_1' is:

X ;
 $C_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}(C=O)C_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}OC_{a1}H_{b1}X_{c1}$;
 $C_{a2}H_{b2}X_{c2}(C=O)OC_{a1}H_{b1}X_{c1}$; and
 $C_{a2}H_{b2}X_{c2}O(C=O)C_{a1}H_{b1}X_{c1}$;

20

where

25

X is a halogen atom;

$a1$ is an integer from 1 to 8;

$b1$ is an integer from 0 to $2(a1)+1-c1$;

$c1$ is an integer from 0 to $2(a1)+1 - b1$;

$b1 + c1$ is at least 1;


30

$a2$ is an integer from 0 to 8;

b_2 is an integer from 0 to $2(a_2) + 1 - c_2$;

c_2 is an integer from 0 to $2(a_2) + 1 - b_2$.


In one example, D_1 is selected from:

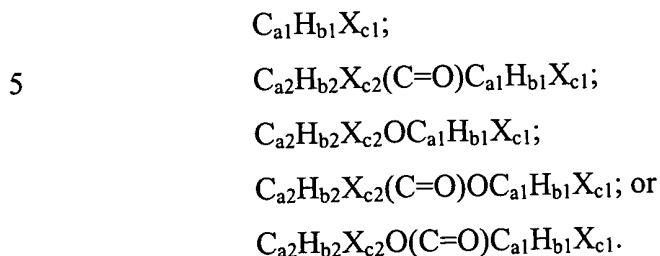

where:

- 10 X is a halogen atom e.g., F, Cl, Br or I;
 a_1 is an integer from 1 to 8;
 b_1 is an integer from 0 to $2(a_1)+1 - c_1$;
 c_1 is an integer from 0 to $2(a_1)+1 - b_1$;
 $b_1 + c_1$ is equal to or greater than 1;
 a_2 is an integer from 0 to 8;
 15 b_2 is an integer from 0 to $2(a_2)+1 - c_2$;
 c_2 is an integer from 0 to $2(a_2)+1 - b_2$;
 $b_2 + c_2$ is equal to or greater than 1;

and D_1' is selected from:

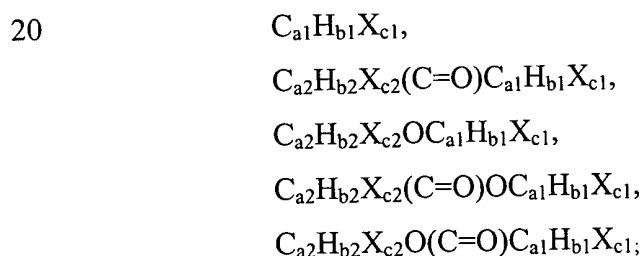

25 where,

- X is a halogen atom e.g. F, Cl, Br or I;
 a_1 is an integer from 1 to 8;
 b_1 is an integer from 0 to $2(a_1)+1 - c_1$
 c_1 is an integer from 0 to $2(a_1)+1 - b_1$
 30 $b_1 + c_1$ is equal to or greater than 1

a2 is an integer from 0 to 8

b2 is an integer from 0 to $2(a2)+1 - c2$

c2 is an integer from 0 to $2(a2)+1 - b2$

b2 + c2 is equal to or greater than 1.

5 In another example, D₁ is a halogen atom, X, e.g., F, Cl, Br or I; and D₁' is selected from:

$C_{a1}H_{b1}X_{c1}$,

$C_{a2}H_{b2}X_{c2}(C=O)C_{a1}H_{b1}X_{c1}$,

$C_{a2}H_{b2}X_{c2}OC_{a1}H_{b1}X_{c1}$,

10 $C_{a2}H_{b2}X_{c2}(C=O)OC_{a1}H_{b1}X_{c1}$,

$C_{a2}H_{b2}X_{c2}O(C=O)C_{a1}H_{b1}X_{c1}$

where,

X is a halogen atom

A1 is an integer from 2 to 8;

15 b1 is an integer from 0 to $2(a1)+1 - c1$

c1 is an integer from 0 to $2(a1)+1 - b1$

b1 + c1 is equal to or greater than 1

a2 is an integer from 0 to 8

b2 is an integer from 0 to $2(a2)+1 - c2$


20 c2 is an integer from 0 to $2(a2)+1 - b2$

b2 + c2 is equal to or greater than 1.

One example of the structural formula of a metallocene compound (CpMCp') of the invention is shown in Fig 3.

Optionally, either or both Cp and Cp' moieties of the metallocene or
25 metallocene-like compounds of the invention further include one or more additional substituent group, D_x. In one example, at least one of Cp and Cp' is a multi-substituted cyclopentadienyl or indenyl moiety.

A generalized structural formula of a CpMCp' metallocene compound of the invention is shown in Fig 4. D₁ and D₁' are independently selected as described above.
30 D₂, D₃, D₄, D₅, D₂', D₃', D₄', and D₅' are independently selected from:

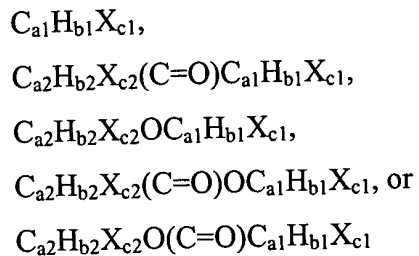

5

where,

a1 is an integer from 0 to 8

b1 is an integer from 0 to $2(a1)+1 - c1$ c1 is an integer from 0 to $2(a1)+1 - b1$

10

b1 + c1 is equal to or greater than 1

a2 is an integer from 0 to 8

b2 is an integer from 0 to $2(a2)+1 - c2$ c2 is an integer from 0 to $2(a2)+1 - b2$

b2 + c2 is equal to or greater than 1

15

Specific examples of ruthenium-based metallocene compounds that can be used in the invention are shown in Table 1 and in Fig. 5.

Table 1	
1-methyl,1'-ethylruthenocene	1,2-dimethyl,1'-ethylruthenocene
1-methyl,1'-propylruthenocene	1-methyl,1',3-diethylruthenocene
1-methyl,1'-isopropylruthenocene	1-methyl,1',2-diethylruthenocene
1-methyl,1'-butylruthenocene	1-methyl,1'-ethyl,3-propylruthenocene
1-methyl,1'-secbutylruthenocene	1-methyl,1'-propyl,3-ethylruthenocene
1-methyl,1'-tertbutylruthenocene	1-ethyl,1'-methyl,3-propylruthenocene
1-ethyl,1'-propylruthenocene	1-methyl,1'-ethyl,2-propylruthenocene
1-ethyl,1'-isopropylruthenocene	1-methyl,1'-propyl,2-ethylruthenocene
1-ethyl,1'-butylruthenocene	1-ethyl,1'-methyl,2-propylruthenocene
1-ethyl,1'-secbutylruthenocene	1-methyl,1'-propylruthenocene
1-ethyl,1'-tertbutylruthenocene	1-methyl-1'-ethylruthenocene
1-propyl,1'-isopropylruthenocene	1,3-dimethyl-1'-ethylruthenocene
1-propyl,1'-butylruthenocene	1,2,1'-dimethyl-3'-ethylruthenocene
1-propyl,1'-secbutylruthenocene	1-butyl-1'-acetyl-ruthenocene
1-propyl,1'-tertbutylruthenocene	1-ethyl-1'-methoxyruthenocene
1-isopropyl,1'-butylruthenocene	1-ethyl-1'-methoxy-2-ethoxyruthenocene
1-isopropyl,1'-secbutylruthenocene	1,2,3,4-tetramethyl-1'-ethylruthenocene
1-isopropyl,1'-tertbutylruthenocene	1-acetyl,1'-ethoxyruthenocene
1-butyl,1'-secbutylruthenocene	1-difluoromethyl-1'-ethylruthenocene
1-butyl,1'-tertbutylruthenocene	1-trifluoromethyl,2,3,4-fluoro-1'-trifluoromethylruthenocene
1-secbutylruthenocene,1'-tertbutylruthenocene	1-ethenyl-1'-fluororuthenocene
1,1',3-trimethylruthenocene	1-ethoxymethyl-1',2'-diethylruthenocene
1,1',2-trimethylruthenocene	1-ethyl,1'-propanoylruthenocene
1,3-dimethyl,1'-ethylruthenocene	1,1',2,4-triethyl-3'-acetyl-ruthenocene

The metallocene compounds that can be employed in the invention also include osmium-based and iron-based compounds similar to those shown in Table 1 or Fig. 5. Similarly, the method of the invention can be used to form metallocenes including other η^n -coordinated aromatic moieties.

5 Suitable metallocene compounds that are employed in the process of the invention are disclosed in U.S. Patent Application by David M. Thompson and Cynthia A. Hoover, with the title *Asymmetric Group 8 (VIII) Metallocene Compounds*, filed concurrently herewith under Attorney Docket Number D-21266, the entire teachings of which are incorporated herein by reference.

10 A suitable synthetic method for preparing metallocene compounds that are employed in the process of the invention is disclosed in U.S. Patent Application, by David M. Thompson and Cynthia A. Hoover with the title of *Methods for Making Metallocene Compounds*, filed concurrently herewith, under Attorney Docket Number D-21245, the entire teachings of which are incorporated herein by reference.

15 The metal salt can be a metal (III) salt, such as, for example, a metal halide (e.g., chloride, bromide, iodide, fluoride), a metal nitrate and other suitable metal salts. M is a Group 8 (VIII) metal, e.g., Ru, Os or Fe. Generally, the metal salt is abbreviated as MX_n . As used herein, the abbreviation MX_n does not exclude metal salt compounds that include water of hydration and that, as known in the art, can be more specifically
20 represented by the formula $MX_n \cdot \mu H_2O$, μ being other than 0. Thus in specific examples, the abbreviation FeX_3 used herein includes anhydrous as well as hydrated iron salts that can be employed to form ferrocenes or ferrocene-like compounds.

 The metal (M) salt (X) can be a metal (III) salt, such as, for example, a metal halide (e.g., chloride, bromide, iodide, fluoride), a metal nitrate and other suitable metal
25 salts. The metal is represented more specifically by the formula MX_n or, if water of hydration is present, by $MX_n \cdot \mu H_2O$. M is Ru, Os or Fe. Metal salts, such as, for instance, $FeX_3 \cdot \eta H_2O$, or FeX_3 , are employed to form ferrocenes or ferrocene-like compounds.

Ligand (L) generally is an electron pair donor compound. A neutral electron pair donor, such as, for example, triphenylphosphine (PPh_3) is employed in one example. Tricyclohexylphosphine and other phosphines of the general formula PR_3 , as well as phosphite triesters, P(OR)_3 , where R is phenyl, cyclohexyl, alkyl or branched alkyl, e.g., t-butyl, group, also can be employed. Other suitable electron pair donors include amines, phosphates, carbonyl compounds, olefins, polyolefins, chelating phosphines, chelating amines and others.

The Cp compound is a precursor of the Cp moiety in the CpMCp' compound described above. Preferably the Cp compound is HCp, e.g., cyclopentadiene or indene.

10 The Cp component also can be provided as a salt of a cyclopentadienyl or indenyl anion, e.g., potassium cyclopentadienyl (KCp), sodium cyclopentadienyl (NaCp), lithium cyclopentadienyl (LiCp) and others. Suitable cations for use with a cyclopentadienyl anion in the synthetic method described herein include trimethylsilyl (TMS), Na, Li, K, Mg, Ca and Tl.

15 At least one hydrogen atom in the Cp moiety is replaced by a group D_1 , as described above. Specific examples of HCp include, methylcyclopentadiene, ethylcyclopentadiene, n-propyl- or isopropylcyclopentadiene, n-butyl-, sec-butyl- or tert-butylcyclopentadiene, or halo-cyclopentadiene.

The Cp compound also can be di- or multi-substituted, e.g., it can be a di-, tri-, tetra- and penta-substituted-cyclopentadiene. Specific examples of substituent groups D_2 , D_3 , D_4 and D_5 are described above.

Each of the MX_n , L and HCp components can be provided in neat form or can optionally include a suitable solvent. Preferred solvents that can be employed in the method of the invention include alcohols, such as, for instance, ethanol, methanol, isopropanol and other alcohols. Ethyl acetate, tetrahydrofuran (THF), saturated or

25 unsaturated hydrocarbons, aromatic heterocycles, alkyl halides, silylated hydrocarbons, ethers, polyethers thioethers, esters, lactones, amides, amines, polyamines, nitriles, silicone oils and other aprotic solvents also can be employed. Combinations of solvents also can be employed.

Generally, concentrations of MX_n , L and Cp are selected as known in the art. For example, the molar concentration of MX_n in a suitable solvent can be in the range of from about 0.1 M to neat. That of L in a suitable solvent can be in the range of from about 0.1 M to neat. The molar concentration of Cp in a suitable solvent can be in the range of from about 0.1 to neat. If neat phosphine is employed it is believed that the reaction would be highly exothermic. Methods and systems for dissipating substantial amounts of heat of reaction per unit volume are known in the art.

The three components can be combined in any order. In one example, the metal component and the HCp component are added concurrently to the L component. In another embodiment, the metal component and the HCp component are combined to form a mixture and then the mixture is combined with the L component, for instance by adding the L component to the mixture. In yet another embodiment, all components are combined at the same time.

Typically the molar ratio of HCp to MX_n used is in the range from about 50 to about 1, preferably from about 12 to about 2 and most preferably in the range from about 7 to about 5. Typically, the molar ratio of L to MX_n is in the range of from about 8 to about 0, preferably from about 6 to about 2 and most preferably from about 5 to about 3.5. If a large excess amount of HCp component is employed, the reaction is driven to forming $(Cp)_2M$ product.

The reaction temperature preferably is around the boiling point of the solvent employed or the boiling point of the reaction mixture. Other suitable temperatures can be determined by routine experimentation. Generally, the reaction can be conducted at a temperature that is in the range of from above the freezing point to about the boiling point of the reaction composition. For instance, the reaction can be conducted at a temperature in the range of from about $-100^{\circ}C$ to about $150^{\circ}C$.

The time of reaction generally depends on temperature, and concentration of the various reactants, and can range, for example, from about 5 minutes to about 96 hours.

The intermediate component formed by the reaction of the MX_n L and HCp can be represented by the formula $CpML_fX$, where $f = 1$ or 2 .

In one example, $CpML_fX$ is isolated, e.g., as a solid, by methods known in the

art. Intermediate compound, CpML_rX , is then reacted with a Cp' compound, preferably in the presence of a solvent. The Cp' compound preferably includes an anion of the Cp' moiety in the compounds of the invention described above. Counterions can include trimethylsilyl (TMS), Na, Li, K, Mg, Ca, Tl. Specific examples of cyclopentadienyl compounds that can be used include, but are not limited to sodium or lithium ethylcyclopentadienide, sodium or lithium methylcyclopentadienide, sodium or lithium isopropylcyclopentadienide and others. Di- or multi-substituted anions of the Cp' moiety also can be employed (e.g., di-, tri-, tetra- or penta-substituted cyclopentadienyl anions). Anions of unsubstituted indenenes, cyclic poly-olefins, polycyclic unsaturated hydrocarbons, heterocycles, aromatic rings also can be employed, as described above.

In a specific example, the intermediate compound is $\text{CpRu}(\text{PPh}_3)_2\text{Cl}$. It is reacted with a salt of Cp' . Recommended salts of Cp' include NaCp' , LiCp' , $(\text{Cp}')_2\text{Mg}$, $\text{TMS}(\text{Cp}')$ and $(\text{Cp}')\text{Tl}$.

Examples of suitable solvents include benzene, toluene, xylenes, pentanes, hexanes, petroleum ether, aromatic heterocycles, saturated or unsaturated hydrocarbons, alkyl halides, silylated hydrocarbons, ethers, polyethers, thioethers, esters, lactones, amides, amines, polyamines, nitriles, silicones, and others.

Generally, the molar concentrations of the Cp' component in a solvent can be in the range of from about 0.1 M to about 3.5 M, preferably in the range of from about 0.5 M to about 2.5 M and most preferably in the range of from about 1.4 to about 1.8 M.

Typically, the molar ratio of Cp' relative to the CpML_rX is in the range from about 50 to about 1, preferably from about 6 to about 1 and most preferably from about 1.6 to about 1.2.

In another example the intermediate CpML_rX is not isolated. Following its formation in solution, a Cp' compound, such as a salt described above, is added to the solution that includes CpML_rX .

The reaction between the Cp' component and the intermediate CpML_rX (whether isolated or not) is conducted at a temperature such as generally described above and results in the formation of CpMCp' product.

The time of reaction generally depends on temperature, and concentration of the

various reactants, and can range from about 15 minutes to about 6 days.

When synthesizing structures of the type CpRuCp' in which one of the rings contains a ketone, ester or ether functionality, it is preferred that the ring with the greater number of ketones, esters or ethers is identified as the Cp' ring, and that it is
5 added to the intermediate as a TMS salt.

The product of the reaction, CpMCp' , can be isolated and or purified by methods known in the art, such as, for example, solvent, e.g., hexane, extraction followed by distillation, sublimation or chromatography or directly by distillation, sublimation or chromatography. Recrystallization, ultracentrifugation and other
10 techniques also can be employed. Alternatively, the product can be employed in the reaction mixture without further isolation and or purification.

A method for forming the compounds of the invention is described by the chemical reaction shown in Fig. 6. In the method depicted in Fig. 6, $\text{MCl}_3 \cdot \mu\text{H}_2\text{O}$, triphenylphosphine and a D_1 -substituted cyclopentadiene react in ethanol, under reflux,
15 to form intermediate compound $\text{CpM}(\text{PPh}_3)_2\text{Cl}$, which then reacts with sodium D_1' -substituted cyclopentadienide to form CpMCp' .

Either or both Cp and/or Cp' can include additional substituent groups, D_x , such as, for instance, groups described above. Thus either or both Cp and/or Cp' can be a di-, tri-, tetra- or penta-substituted cyclopentadiene moiety.

20 A synthetic scheme that can be employed to form a specific di-substituted asymmetric ruthenocene, i.e., 1-methyl,1'-ethylruthenocene or (methylcyclopentadienyl)ethylcyclopentadienyl)ruthenium), is shown in Fig. 7. As shown in Fig. 7, $\text{RuCl}_3 \cdot \text{XH}_2\text{O}$, triphenylphosphine and methylcyclopentadiene react in ethanol, under reflux, to form intermediate compound
25 chloro(methylcyclopentadienyl)bis(triphenylphosphine)ruthenium(II) or $(\eta^5\text{-C}_5\text{H}_4\text{C}_2\text{H}_5)\text{Ru}(\text{PPh}_3)_2\text{Cl}$, which then reacts with a sodium ethylcyclopentadienide to form 1-methyl,1'-ethylruthenocene.

Examples of techniques that can be employed to characterize the compounds formed by the synthetic methods described above include, but are not limited to,
30 analytical gas chromatography, nuclear magnetic resonance (NMR), thermogravimetric

analysis (TGA), inductively coupled plasma mass spectrometry (ICPMS), vapor pressure and viscosity measurements.

Relative vapor pressures, or relative volatility, of precursors described above can be measured by thermogravimetric analysis techniques known in the art. Equilibrium
5 vapor pressures also can be measured, for example by evacuating all gases from a sealed vessel, after which vapors of the compounds are introduced to the vessel and the pressure is measured as known in the art.

Without being held to a particular mechanism, it is believed that specific functionalization of the Cp and Cp' rings to tailor the properties of Group 8 (VIII)
10 metallocenes, such as solubility, vapor pressure, decomposition, combustion and other reaction pathways, reduction/oxidation potentials, geometry, preferred orientations and electron density distribution. For example, it is believed that larger substituent D₁ and/or D₁' contribute to an increase in molecular entropy and that metallocene compounds described herein are more likely to be liquid at room temperature in
15 comparison to previously disclosed compounds.

In the process of the invention, a metallocene compound described above is decomposed and the organic moieties are eliminated, resulting in the formation of a Group 8 (VIII) metal-based or Group 8 (VIII) metal oxide-based film, coating or powder.

20 Precursors described herein that are liquid at room temperature are well suited for preparing *in-situ* powders and coatings. For instance, a liquid precursor can be applied to a substrate and then heated to a temperature sufficient to decompose the precursor, thereby eliminating the organic groups and forming a metal or metal oxide coating on the substrate. Applying a liquid precursor to the substrate can be by
25 painting, spraying, dipping or by other techniques known in the art. Heating can be conducted in an oven, with a heat gun, by electrically heating the substrate, or by other means, as known in the art. A layered coating can be obtained by applying a precursor, and heating and decomposing it, thereby forming a first layer, followed by at least one other coating with the same or a different precursors, and heating.

Liquid metallocene precursors such as described above also can be atomized and sprayed onto a substrate. Atomization and spraying means, such as nozzles, nebulizers and others, that can be employed are known in the art.

In preferred embodiments of the invention, a metallocene or metallocene-like compound, such as described above, is employed in gas phase deposition techniques for forming powders, films or coatings. The compound can be employed as a single source precursor or can be used together with one or more other precursors, for instance, with vapor generated by heating at least one other organometallic compound or metal complex. More than one metallocene precursors, such as described above, also can be employed in a given process.

Deposition can be conducted in the presence of other gas phase components. In one embodiment of the invention, film deposition is conducted in the presence of at least one non-reactive carrier gas. Examples of non-reactive gases include inert gases, e.g., nitrogen, argon, helium, as well as other gases that do not react with the precursor under process conditions. In other embodiments, film deposition is conducted in the presence of at least one reactive gas. Some of the reactive gases that can be employed include but are not limited to hydrazine, oxygen, hydrogen, air, oxygen-enriched air, ozone (O_3), nitrous oxide (N_2O), water vapor, organic vapors and others. As known in the art, the presence of an oxidizing gas, such as, for example, air, oxygen, oxygen-enriched air, O_3 , N_2O or a vapor of an oxidizing organic compound, favors the formation of a metal oxide film. It is believed that the presence or oxygen atoms in the D_1 , D_1' , D_x and D_x' organic groups also favors the formation of metal oxides.

Deposition processes described herein can be conducted to form a film, powder or coating that includes a single metal, e.g., an Os-film, or a film, powder or coating that includes a single metal oxide, e.g., RuO_2 . Mixed films, powders or coatings also can be deposited, for instance mixed metal oxide films. A mixed metal oxide film can be formed, for example, by employing several organometallic precursors, at least one of which being selected from the metallocene or metallocene-like compounds described above.

Gas phase film deposition can be conducted to form film layers of a desired thickness, for example, in the range of from about 1 nm to over 1 mm. The precursors described herein are particularly useful for producing thin films, e.g., films having a thickness in the range of from about 10 nm to about 100 nm. Films of ruthenium, for instance, can be considered for fabricating metal electrodes, in particular as p-channel metal electrodes in logic, and as capacitor electrodes for DRAM applications.

The process also is suited for preparing layered films, wherein at least two of the layers differ in phase or composition. Examples of layered film include metal-insulator-semiconductor (MIS), and metal-insulator-metal (MIM).

10 In one embodiment, the invention is directed to a process that includes the step of decomposing vapor of a metallocene or metallocene-like precursor described above, e.g., one of the compounds shown in Table 1, thermally, chemically, photochemically or by plasma activation, thereby forming a film on a substrate. For instance, vapor generated by the compound, preferably a liquid at room temperature, is contacted with a
15 substrate having a temperature sufficient to cause the metallocene compound to decompose and form a film that includes a Group 8 (VIII) metal or Group 8 (VIII) metal oxide on the substrate.

The precursors can be employed in CVD or, more specifically, in metallo-organic chemical vapor deposition (MOCVD) processes known in the art. For instance,
20 the precursors described above can be used in atmospheric, as well as in low pressure, CVD processes. The compounds can be employed in hot wall CVD, a method in which the entire reaction chamber is heated, as well as in cold or warm wall type CVD, a technique in which only the substrate is being heated.

The precursors described above also can be used in plasma or photo-assisted
25 CVD processes, in which the energy from a plasma or electromagnetic energy, respectively, is used to activate the CVD precursor. The compounds also can be employed in ion-beam, electron-beam assisted CVD processes in which, respectively, an ion beam or electron beam is directed to the substrate to supply energy for decomposing a CVD precursor. Laser-assisted CVD processes, in which laser light is
30 directed to the substrate to affect photolytic reactions of the CVD precursor, also can be

used.

The process of the invention can be conducted in various CVD reactors, such as, for instance, hot or cold-wall reactors, plasma-assisted, beam-assisted or laser-assisted reactors, as known in the art.

5 Precursors that are liquid at room temperature often are preferred during CVD manufacturing and several asymmetric ruthenocene compounds described above have properties that make them suitable as CVD precursors. 1-methyl,1'-ethylruthenocene, for instance, has a melting point of 2°C. 1-ethyl,1'-isopropylruthenocene has a melting point of 3°C; 1-methyl,1'-isopropylruthenocene is a liquid at room temperature. The
10 previously used symmetric 1, 1'-diethylruthenocene, has a melting point of 6°C, while 1-ethylruthenocene has a melting point of 12 °C.

Examples of substrates that can be coated employing the process of the invention include solid substrates such as metal substrates, e.g., Al, Ni, Ti, Co, Pt, Ta; metal silicides, e.g., TiSi₂, CoSi₂, NiSi₂; semiconductor materials, e.g., Si, SiGe, GaAs,
15 InP, diamond, GaN, SiC; insulators, e.g., SiO₂, Si₃N₄, HfO₂, Ta₂O₅, Al₂O₃, barium strontium titanate (BST); barrier materials, e.g., TiN, TaN; or on substrates that include combinations of materials. In addition, films or coatings can be formed on glass, ceramics, plastics, thermoset polymeric materials, and on other coatings or film layers. In preferred embodiments, film deposition is on a substrate used in the manufacture or
20 processing of electronic components. In other embodiments, a substrate is employed to support a low resistivity conductor deposit that is stable in the presence of an oxidizer, at high temperature, e.g., a Ru metal or RuO₂ film, or an optically transmitting film, e.g., RuO₂.

The process of the invention can be conducted to deposit a film on substrate that
25 has a smooth, flat surface. In a preferred embodiment, the process is conducted to deposit a film on a substrate used in wafer manufacturing or processing. For instance, the process can be conducted to deposit a film on patterned substrates that include features such as trenches, holes or vias. Furthermore, the process of the invention also can be integrated with other steps in wafer manufacturing or processing, e.g., masking,
30 etching and others.

CVD or MOCVD films can be deposited to a desired thickness. For example, films formed can be less than 1 micron thick, preferably less than 500 nanometer and more preferably less than 200 nanometer thick. Films that are less than 50 nanometer thick, for instance, films that have a thickness between about 20 and about 30

5 nanometer, also can be produced.

Asymmetric metallocene compounds described above also can be employed in the process of the invention to form films by atomic layer deposition (ALD) or atomic layer nucleation (ALN) techniques, during which a substrate is exposed to alternate pulses of precursor, oxidizer and inert gas streams. Sequential layer deposition
10 techniques are described, for example, in U.S. Patent No. 6,287,965, issued on Sep. 11, 2001 to Kang, *et al.* and in U.S. patent No. 6,342,277, issued on January 29, 2002 to Sherman. The teachings of both patents are incorporated herein by reference in their entirety.

For example, in one ALD cycle, a substrate is exposed, in step-wise manner, to:
15 a) an inert gas; b) inert gas carrying precursor vapor; c) inert gas; and d) oxidizer, alone or together with inert gas. In general, each step can be as short as the equipment will permit (e.g. millimeters) and as long as the process requires (e.g., several seconds or minutes. The duration of one cycle can be as short as milliseconds and as long as minutes. The cycle is repeated over a period that can range from a few minutes to
20 hours. Film produced can be a few nanometers thin or thicker, e.g., 1 millimeter (mm).

The process of the invention also can be conducted using supercritical fluids. Examples of film deposition methods that use supercritical fluid that are currently known in the art include chemical fluid deposition (CFD); supercritical fluid transport-chemical deposition (SFT-CD); supercritical fluid chemical deposition (SFCD); and
25 supercritical immersion deposition (SFID).

CFD processes, for example, are well suited for producing high purity films and for covering complex surfaces and filling of high-aspect-ratio features. CFD is described, for instance, in U.S. Patent No. 5,789,027, issued to Watkins, *et al.*, on August 4, 1998. The use of supercritical fluids to form films also is described in U.S.

Patent No. 6,541,278 B2, issued on April 1, 2003 to Morita, et al. The teachings of these two patents are incorporated herein by reference in their entirety.

In one embodiment of the invention, a heated patterned substrate is exposed to one or more precursors, such as one or more precursors shown in Table 1, e.g., 1-
5 methyl,1'-ethylruthenocene, in the presence of a solvent, such as a near critical or supercritical fluid, e.g., near critical or supercritical CO₂. In the case of CO₂, the solvent fluid is provided at a pressure above about 1000 psig and a temperature of at least about 30°C.

The precursor is decomposed to form a Group 8 (VIII) metal film on the
10 substrate. The reaction also generates organic material from the Cp and Cp' moieties in the precursor. The organic material is solubilized by the solvent fluid and easily removed away from the substrate. Metal oxide films also can be formed, for example by using an oxidizing gas.

In one example, the deposition process is conducted in a reaction chamber that
15 houses one or more substrates. The substrates are heated to the desired temperature by heating the entire chamber, for instance, by means of a furnace. Vapor of the metallocene compound can be produced, for example, by applying a vacuum to the chamber. For low boiling compounds, the chamber can be hot enough to cause vaporization of the compound. As the vapor contacts the heated substrate surface, it
20 decomposes and forms a metal or metal oxide film. As described above a metallocene or metallocene-like precursor can be used alone or in combination with one or more components, such as, for example, other organometallic precursors, inert carrier gases or reactive gases.

A schematic diagram of a system that can be used in producing films by the
25 process of the invention is shown in Fig. 8. As shown in Fig. 8, raw materials are directed to a gas-blending manifold to produce process gas that is supplied to a deposition reactor, where film growth is conducted. Raw materials include, but are not limited to, carrier gases, reactive gases, purge gases, precursor, etch/clean gases, and others. Precise control of the process gas composition is accomplished using mass-flow
30 controllers (MFCs), valves, pressure transducers, and other means, as known in the art.

Also shown in Fig. 8 is an exhaust manifold that conveys gas exiting the deposition reactor, as well as a bypass stream, to a vacuum pump. An abatement system, downstream of the vacuum pump, is used to remove any hazardous materials from the exhaust gas.

5 The deposition system is equipped with *in-situ* analysis system, including a residual gas analyzer, which permits measurement of the process gas composition. A control and data acquisition system monitors the various process parameters (e.g., temperature, pressure, flow rate, etc.).

10 Shown in Fig. 9 is a schematic diagram of apparatus 10 that is an example of a suitable apparatus that can be employed to prepare process gas for film deposition by the method of the invention. Apparatus 10 includes vaporizer 12, where a liquid or solid precursor is vaporized by means known in the art. The temperature of the precursor, which determines its vapor pressure, is monitored by a thermocouple, and is controlled by resistive heaters. A suitable mathematical equation that can be used to
15 correlate the vapor pressure of the compound to the temperature is:

$$\ln P_{\text{sat}} = A - B/T$$

where $\ln P_{\text{sat}}$ is the natural logarithm of the saturated vapor pressure, A and B are experimentally or theoretically derived constants and T is the absolute temperature (Kelvin).

20 A carrier gas, such as nitrogen, is supplied to vaporizer 12 from a gas source 14, e.g., a gas tank. The desired flow rate of the carrier gas is controlled by MFC 16. Pressure of the carrier gas is measured by pressure gauge 18. Valves 20 and 22 are employed to control the flow of the gas supplied to vaporizer 12. Valves 24 and 26 are employed to control the flow of the vaporized precursor and carrier gas that exit the
25 vaporizer. Closing by-pass valve 28 directs carrier gas to vaporizer 12. Needle valve 30, located downstream of vaporizer 12, is used to control the total pressure inside the vaporizer and flow of process gas supplied to deposition reactor 32.

Assuming the gas exiting the vaporizer is fully saturated (i.e. partial pressure equals the vapor pressure), the flow rate of the precursor can be determined using the
30 carrier gas flow rate, total pressure, and precursor vapor pressure.

Fig. 10 is a schematic diagram of deposition reactor 32. The process gas that includes carrier gas and vapor phase precursor is introduced via inlet 34. Multiple inlets or apertures also can be employed for separate injection of process gases, vapors or supercritical fluids.

5 Film is deposited on substrate 36. A fixed gap spacing is maintained between the bottom of inlet 34 and the top of substrate 36. Substrate 36 is supported by a molybdenum susceptor 38. Susceptor 38 is a disk, capable of holding samples, e.g., having a diameter of up to 3". The reactor can be modified to deposit films over larger substrates, for example, on 200 or 300 millimeter (mm) wafers.

10 Susceptor temperature is measured using a thermocouple 40, and controlled by a tungsten-halogen lamp 42. Deposition reactor pressure is monitored using a capacitance manometer 44. During film deposition, substrate 36 is heated to the desired temperature, and brought into contact with the process gas. A vacuum pump is used to reduce the pressure within the deposition reactor.

15 In other examples, the reaction chamber is provided with in situ analysis and/or automatic process control and data acquisition. Isothermal control of process lines and chamber walls also can be provided.

 Generally, the pressure in deposition reactor 32 is in the range of from about 0.01 Torr to 760 Torr, preferably in the range of from about 0.1 Torr to about 760 Torr
20 and most preferably in the range of from about 1 Torr to about 50 Torr.

 Generally, film deposition is conducted at a temperature in the range of from about 75° C to about 700° C, preferably in the range of from about 250° C to 450° C.
temperature

 As known in the art, the presence of an oxidizing gas, such as, for example, air,
25 oxygen, oxygen-enriched air, ozone (O₃), nitrous oxide (N₂O) or a vapor of an oxidizing organic compound, favors the formation of a metal oxide film. Other techniques that favor forming a metal oxide film also can be employed, as known in the art. The oxidizer partial pressure generally is in the range of from about 0 to about 50 Torr. The molar ratio of oxidizer to precursor can be in the range of from 0 to 10,000.

The precursors described above can be employed to produce films that include a single metal, e.g, an Os-film, or a film that includes a single metal oxide, e.g., RuO₂. Mixed films also can be deposited, for instance mixed metal oxide films. Such films are produced, for example, by employing several organometallic precursors, at least one of which being selected from the metallocene or metallocene-like compounds described above.

Metal films also can be formed, for example, by using no carrier gas, vapor or other sources of oxygen.

Films formed by the methods described herein can be characterized by techniques known in the art, for instance, by X-ray diffraction (XRD), Auger spectroscopy, X-ray photoelectron emission spectroscopy (XPS), atomic force microscopy (AFM), scanning electron microscopy, and other techniques known in the art. Resistivity and thermal stability of the films also can be measured, by methods known in the art.

EXEMPLIFICATION

EXAMPLE 1

STEP A

A 5 L five-necked round bottomed flask was equipped with a mechanical stirring paddle through the central neck. It was then charged with ethanol (2.0 L) and PPh₃ (420 g, 1.6 mol). Two 500 mL three necked flasks, were connected to two necks of the 5 L four-necked flask via Teflon[®] (perfluorinated polymer, DuPont Corp.) tubing through positive displacement pumps. The remaining neck of the 5 L flask was equipped with a condenser. A heating mantle was placed beneath the 5 L flask and the solution was stirred and heated to reflux. At reflux all of the triphenylphosphine dissolved in the ethanol. The system was purged with nitrogen for 30 minutes while at reflux.

While this was taking place one of the 500 mL round-bottomed flasks was charged with $\text{RuCl}_3 \cdot \text{XH}_2\text{O}$ (100 g, 0.40 mol), ethanol (300 mL) and a Teflon[®] (perfluorinated polymer, DuPont Corp.) coated magnetic stirring bar. The ethanolic solution immediately developed a brown/orange colour. To dissolve all of the $\text{RuCl}_3 \cdot \text{XH}_2\text{O}$ it was necessary to heat the solution. This solution was sparged with nitrogen for 30 minutes by inserting a needle connected to a 1-2 pounds per square inch gauge (psig) nitrogen source through the septum and into the solution and by piercing the septum with another needle to allow for relief of excess pressure.

An acetonitrile/dry ice bath was made up and the other 500 mL flask was immersed into this bath. Freshly distilled methylocyclopentadiene (190 g, 270 mL, 2.4 mol, freshly distilled under a nitrogen atmosphere) was then cannulated into the cooled flask.

After the nitrogen sparging of the ethanolic solutions of triphenylphosphine and ruthenium trichloride had completed, the contents of the two 500 mL flasks were pumped into the 5.0 L flask by positive displacement pumps at independent rates so that both additions completed after 5 minutes. To accomplish this the ethylcyclopentadiene was pumped in at a rate of 45 mL/min and the ethanolic ruthenium trichloride was pumped in at a rate of 50 mL/min.

After the addition had been completed the solution was left to reflux for an additional 2 hours. During this time small orange crystals could be seen accumulating above the meniscus of the solution on the walls of the 2 L flask.

STEP B

The two positive displacement pumps and Teflon[®] (perfluorinated polymer, DuPont Corp.) lines were disconnected from the 5 L flask after the 2 hours of stirring. A distillation sidearm was connected one of the necks of the flask and approximately 1 L of ethanol was removed via distillation. Mechanical stirring was discontinued and the orange crystals settled to the bottom of the flask. The solution cooled to room temperature over 3 hours. The solution was then removed from the flask by inserting a piece of glass tubing with a coarse frit attached to the end of it and using reduced

pressure to draw the solution through the frit and out of the flask. The crystals were washed with heptane (300 mL) and the heptane was removed in a similar fashion. The washing was carried out three times.

STEP C

5 All of the open ports to the flask were sealed with rubber septa and the flask was evacuated and refilled with nitrogen three times. THF (500 mL, anhydrous) was cannulated into the flask and mechanical stirring was initiated. A THF solution of lithium ethylcyclopentadiene (500 mL, 1.2 M, 0.60 mol) was then cannulated into the 5 L flask. The contents were heated to reflux and stirred for 4 hours.

10 After the 4 hours of reflux, stirring was discontinued and the solution was transferred to a 2 L one necked round bottomed flask. This solution was concentrated to a volume of approximately 200 mL on a rotary evaporator. The viscous liquid was then transferred to a 250 mL round bottomed flask.

The 250 mL round-bottomed flask was fitted with a short path distillation
15 adapter with vigreux indentations and a 100 mL storage flask receptacle. The liquid was distilled under vacuum and a clear yellow liquid, 1-methyl, 1'-ethylruthenocene containing some triphenylphosphine (determined by GCMS). Spinning band distillation of the yellow liquid afforded 84.6 g (82% yield) of triphenylphosphine free 1-methyl, 1'-ethylruthenocene in >99% purity (GCMS, ¹H NMR), with the remaining impurities
20 being attributable to 1,1'-dimethylruthenocene and 1,1'-diethylruthenocene. TGA studies showed that this liquid had less than 0.01% nonvolatile residue.

EXAMPLE 2

25 A 2 L three-necked round bottomed flask was charged with a Teflon[®] (perfluorinated polymer, DuPont Corp.) stirring bar, ethanol (1.0 L) and PPh₃ (263 g, 1.0 mol, 5 eq). A 250 mL dropping funnel, a 150 mL bath-jacketed dropping funnel, and a condenser were attached to the three necks of the 2L flask. It is important to note that both dropping funnels were equipped with Teflon[®] valves that permitted their

isolation from the atmosphere of the round-bottomed flask. A rubber septum was connected to the top of the 150 mL bath-jacketed dropping funnel. The top of the condenser was fitted with an T junction adapter and connected to an inert atmosphere. A heating mantle was placed beneath the 2 L three-necked round-bottomed flask and the solution was stirred and heated to reflux. At reflux all of the triphenylphosphine dissolved in the ethanol. The system was purged with nitrogen for 3 hours while at reflux.

While this was taking place a 500 mL erlenmyer flask was charged with $\text{RuCl}_3 \cdot \text{XH}_2\text{O}$ (50 g, 0.20 mol), ethanol (150 mL, 1 eq) and a Teflon[®] (perfluorinated polymer, DuPont Corp.) coated magnetic stirring bar. The ethanolic solution immediately developed a brown/orange colour. To dissolve all of the $\text{RuCl}_3 \cdot \text{XH}_2\text{O}$ it was necessary to gently heat the solution. This solution was poured into the 250 mL dropping funnel and the dropping funnel was fitted with a rubber septum. This solution was sparged with nitrogen for 30 minutes by inserting a needle connected to a 1-2 psig nitrogen source through the septum and into the solution and by piercing the septum with another needle to allow for relief of excess pressure.

A methanol/dry ice bath was made up in the 150 mL bath-jacketed dropping funnel. The interior of this dropping funnel was purged with nitrogen for 30 minutes in a similar fashion to which the other dropping funnel was sparged. Methylcyclopentadiene (96.2 g, 1.2 mol, 6 eq, doubly distilled under a nitrogen atmosphere) was then cannulated into the cooled dropping funnel through the rubber septum.

After the 3 hours of purging the 2 L-round bottomed flask had elapsed, the Teflon[®] valves isolating the dropping funnels from the rest of the system were both opened and dropwise addition of the two solutions commenced simultaneously. Over the course of 20 minutes the two solutions were both added to the ethanolic PPh_3 solution. During this entire time the solution was at reflux. The solution quickly developed a deep orange brown color. After the addition had been completed the solution was left to reflux for an additional 2 hours. During this time small orange

crystals of $\text{CpRu}(\text{PPh}_3)_2\text{Cl}$ could be seen accumulating above the meniscus of the solution on the walls of the 2 L flask.

A piece of tubing with a coarse porous frit attached to one end was attached to a positive displacement pump. The fritted end of the tubing was immersed in the reactor and all of the liquids were pumped out of the 2 L round-bottomed flask. At this stage the dropping funnels were removed from the reactor. One side was fitted with a K-Head distillation adapter and the other side was fitted with a rubber septum. The flask was evacuated and refilled with nitrogen three times. Working under nitrogen, anhydrous toluene (1.0 L) was cannulated into the 5 L flask through the rubber septum. The dark opaque solution was heated to reflux and the K-head distillation adapter was opened to distill off a fraction of the solvent. Distillate was collected until the head temperature reached 109 °C (It is important to note that in different experiments this consumes different volumes of solvent – typically 400-600 mL of liquid). The solution was then cooled to below reflux.

The flask was then charged with additional toluene to obtain a volume of approximately 600 mL toluene. A lithium ethylcyclopentadienide slurry of toluene (35 g, 0.35 mol, 400 mL) was then cannulated into the reaction pot. Following this addition the solution was stirred for 4 hours at 80 °C. At this stage the flask was removed from the glovebox and the majority of toluene was removed using a K-head distillation adapter.

The remaining liquid (approximately 400 mL) was decanted into a 1.0 L round-bottomed flask. This round-bottomed flask was fitted with a short path distillation adapter with vigreux indentations and distilled. The liquid collected from the vigreux column was distilled again using spinning band distillation under vacuum and 44 g of a clear yellow liquid, 1-methyl,1'-ethylruthenocene was obtained in >99% purity (GCMS). TGA studies showed that this liquid had less than 0.01% nonvolatile residue.

EXAMPLE 3

Lithium(ethylcyclopentadienide) was produced as follows. A 2 L three-necked jacketed round bottomed flask was charged with a Teflon[®] (perfluorinated polymer, DuPont Corp.) stirring bar. A stopcock adapter, a thermowell adapter with thermowell and a rubber septum were fitted to the three necks of the flask. A nitrogen/vacuum manifold was connected to the stopcock adapter and the flask was evacuated and refilled with nitrogen 3 times. Anhydrous toluene (1.0 L) was then cannulated into the flask through the rubber septum and stirring was initiated. A cold fluid circulator was connected to the outer jacket of the jacketed flask with nalgene tubing and a cold fluid (-15 °C) was circulated through the outside wall of the jacketed flask. Once the toluene reached -10 °C, freshly distilled ethylcyclopentadiene (middle cut distilled on a vigreux column) was cannulated into the flask (127 g, 1.35 mol). While stirring, n-butyllithium (800 mL, 1.6 M in hexanes, 1.28 mol) was slowly cannulated at a rate that kept the temperature below 0 °C (approximately 2 hours). During the addition of the n-butyllithium a fine white precipitate (lithium ethylcyclopentadienide) became evident in the solution.

This material could be used as a suspension or isolated as a solid via filtration and removal of solvent.

EXAMPLE 4

In a nitrogen glovebox, a 250 mL flask was charged with THF (50 mL, anhydrous, inhibitor free), chloro(ethylcyclopentadienyl)bis(triphenylphosphine)ruthenium(II) (3.22 g, 0.004 mol, 1 equivalent) and a Teflon[®] (perfluorinated polymer, DuPont Corp.) stirring bar. The solution was stirred and a burgundy colored THF solution of sodium isopropylcyclopentadienide was slowly added (0.20 M, 30 mL, 1.5 equivalents). Following the addition the solution developed a deep red color. Within 30 minutes, the meniscus appeared yellow in color. The solution was stirred overnight.

An aliquot (1.0 mL) was taken from the solution and was analyzed by GC/MS. A peak with a mass of 301 g/mol was observed consistent with the 1-ethyl-1'-isopropylruthenocene. Other peaks with masses consistent with the presence of alkylcyclopentadiene dimers, 1,1'-diethylruthenocene, 1,1'-diisopropylruthenocene and triphenylphosphine were also observed.

The THF solvent was then removed from the flask under reduced pressure. The 250 mL flask was fitted with a vacuum jacketed short path distillation adapter and the contents of the flask were distilled under reduced pressure (~ 0.1 torr). A pale yellow liquid was collected (0.72 g). This liquid was then purified via chromatography. A silica gel in pentane solution was used. The column had a diameter of 0.75" and a 6" length. 0.53 g of 99+% pure 1-ethyl-1'-isopropylruthenocene were isolated via chromatography (41% yield).

EXAMPLE 5

In a nitrogen glovebox, a 250 mL flask was charged with THF (50 mL, anhydrous, inhibitor free), chloro(methylcyclopentadienyl)bis(triphenylphosphine)ruthenium(II) (5.02 g, 0.007 mol, 1 equivalent) and a Teflon[®] (perfluorinated polymer, DuPont Corp.) stirring bar. The solution was stirred and a burgundy colored THF solution of sodium isopropylcyclopentadienide was slowly added (0.20 M, 50 mL, 1.5 equivalents). Following the addition the solution developed a deep red color. Within 30 minutes, the meniscus appeared yellow in color. The solution was stirred overnight.

An aliquot (1.0 mL) was taken from the solution and was analyzed by GC/MS. A peak with a mass of 287 g/mol was observed consistent with 1-methyl-1'-isopropylruthenocene. Other peaks with masses consistent with the presence of alkylcyclopentadiene dimers, 1,1'-dimethylruthenocene, 1,1'-diisopropylruthenocene and triphenylphosphine were also observed.

The THF solvent was then removed from the flask under reduced pressure. The 250 mL flask was fitted with a vacuum jacketed short path distillation adapter and the

contents of the flask were distilled under reduced pressure (~ 0.1 torr). A pale yellow liquid was collected (1.78 g). This liquid was then purified via chromatography. A silica gel in pentane solution was used. The column had a diameter of 0.75" and a 6" length. 1.03 g of 98+% pure 1-methyl-1'-isopropylruthenocene were obtained after
5 chromatography (53% yield).

EXAMPLE 6

In a nitrogen glovebox, a 250 mL flask was charged with
10 bis(propylcyclopentadienyl)magnesium (5.15 g, 0.02 mol, 1 equivalent),
chloro(methylcyclopentadienyl)bis(triphenylphosphine)ruthenium(II) (5.02 g, 0.007
mol, 1 equivalent) and a Teflon® (perfluorinated polymer, DuPont Corp.) stirring bar.
Toluene (120 mL, anhydrous, inhibitor free) was cannulated into the 250 mL round-
bottomed flask and the contents were stirred. Following the addition of solvent the
15 solution developed a deep red color.

The toluene solvent was then removed from the flask under reduced pressure.
The toluene solvent was removed under reduced pressure and the flask was fitted with a
short path distillation adapter. The distillate was collected and the GC/MS revealed that
the main cut from the short path distillation was 88.7% pure 1-propyl-1'-
20 ethylruthenocene.

EXAMPLE 7

The vapor pressure of ruthenium precursors was measured. The vapor pressure of
25 (MeCp)(EtCp)Ru was at least twice that of (EtCp)₂Ru, within the temperature range
studied (25-70 °C).

Using a glove box with an inert atmosphere, approximately 1 g of
(MeCp)(EtCp)Ru was placed within the vaporizer. Prior to deposition, the substrates
were ultrasonically cleaned, at room temperature.

The substrates were rinsed for 1 minute intervals, first with H₂O, followed by a solution of 1:1:5-NH₄OH:H₂O₂:H₂O, then finally by H₂O. The substrates were then dried using nitrogen. Sample introduction and removal from the reactor was accomplished using a load-lock, equipped with a magnetically coupled transfer arm.

5 Once the substrates were loaded, and positioned above the heater, deposition of the films proceeded by the following sequence. First, the substrates were heated to the desired temperature. The samples were then exposed to the process gas, containing the precursor(s) and any co-reactants (e.g. oxidizing agents). Ultra high purity (UHP), greater than 99.999%, nitrogen was used as the carrier and purge gas. UHP oxygen was
10 used as the oxidizing gas. The precursor, (methylcyclopentadienyl)-
(ethylcyclopentadienyl) ruthenium, was vaporized using UHP nitrogen.

EXAMPLE 8

15 Ruthenium films were deposited on silicon oxide (SiO₂)/silicon (Si) substrates, employing an apparatus such as shown in Figs. 9 and 10. A summary of the reaction conditions and results is given in Table 2. During all of these experiments, the total flow rate of gas was fixed at 750 standard cubic centimeter per minute (sccm), and the precursor flow rate was 0.4 sccm. The temperature of the substrate was measured by a
20 dual-wavelength pyrometer manufactured by Williamson Co., of Concord, Massachusetts. The pressure in the reactor was measured using a heated Baratron capacitance monometer capable of measuring 0.1 to 1000 Torr and manufactured by MKS Instruments, of Andover, Massachusetts. Gap refers to the distance, in inches, between process gas inlet tube and substrate being coated. The flow rate of oxygen was
25 adjusted, according to the ratios in Table 2, and the balance of gas was nitrogen. Ratio of O₂ to precursor was the molar flow rate of oxygen divided by the molar flowrate of precursor in the process gas. As seen in Table 2, the time during which the substrate was exposed to the complete process gas mixture (vapors, O₂ reactant gas, N₂ carrier gas) varied between 15 and 60 minutes.

Table 2

Run	Deposition Time, min	T, °C	P, Torr	Gap, inches	Ratio of O ₂ /precursor	Purpose	Comments
(a)	30	240	30	1	50	Deposit film	First attempt, no visible deposition
(b)	60	360	2	1	500	Deposit film	First successful deposition
(c)	15	360	2	2	500	Increase uniformity by increasing gap	Pyrometer output oscillated, indicated film growth
(d)	15	360	2	2	50	Increase uniformity by decreasing O ₂ /precursor ratio to about 50	Better uniformity than run (b)
(e)	15	280	20	2	50	Grow Ru film at lower temperature and higher pressure	No visible deposition
(f)	15	360	2	2	50	Repeat (d) to see if precursor was gone during run (e)	Similar to (d), yet slightly thinner (precursor was close to, or fully depleted)

The thickness of the deposited films was measured by cross-sectional scanning electron microscopy (SEM). Sheet resistance, and corresponding resistivity, was measured using a 4-point probe. Elemental composition was ascertained by various techniques, including energy dispersive spectroscopy (EDS) and XPS. Figs. 11 and 12 show cross-sectional views at 75 degrees tilt of a sample from run (d), collected by a scanning electron microscope. The film formed by the conditions of run (d) was found to have good properties with respect to thickness uniformity and resistivity. The ruthenium film was approximately 200 nanometers (nm) thick. Sheet resistance was measured to be 0.11 Ω /sq, by a 4 point probe method. This resulted in a resistivity of 22 $\mu\Omega$ cm. A spectrum obtained by energy dispersive spectroscopy (EDS), shown in Fig. 13, confirmed the presence of a thin film of ruthenium on a SiO₂/Si substrate.

It is expected that thinner films, e.g., 20 to 30 nm thick, also can be produced, for example by reducing the deposition time.

EXAMPLE 9

Experimental runs a-f (described in Example 8) and additional runs 1-32 are shown in Table 3. Experiments were carried out employing an apparatus such as described with reference to Figs. 9 and 10. As seen in Table 3, substrates included SiO₂/Si, aluminum oxide and patterned wafers. All film deposition experiments were conducted using a nitrogen flow of 100 standard cubic centimeters per minute (sccm) through the precursor vaporizer. The gap was 2 inches for runs c-f and runs 1-32. (Runs a-b were conducted with an one inch gap.) The vaporizer pressure was 250 Torr in Runs 15 and 18 and 50 Torr in all other cases.

Table 3

Run #	Precursor	Deposition Time, min	Substrate Temperature, C	Reactor Pressure, Torr	Flow of oxygen, sccm	Vaporizer temperature, C	Purpose	Comments
a	(MeCp)(EtCp)Ru	30	240	30	20	70	Grow Ru film	first attempt using (EtCp)(MeCp)Ru
b	(MeCp)(EtCp)Ru	60	360	2	200	70	Grow Ru film	first successful growth
c	(MeCp)(EtCp)Ru	15	360	2	200	70	Increase uniformity by increasing gap	pyrometer oscillated, indicated film growth
d	(MeCp)(EtCp)Ru	15	360	2	20	70	Increase uniformity by decreasing O ₂ /precursor ratio to about 50	no visible growth
e	(MeCp)(EtCp)Ru	15	280	20	20	70	Grow Ru film at lower temperature and higher pressure	similar to 20021028B, yet slightly thinner (precursor close to, or fully depleted)
f	(MeCp)(EtCp)Ru	15	360	2	20	70	Repeat (d) to see if precursor was gone during (e)	Looked like it grew faster than 2 Torr run
1	(MeCp)(EtCp)Ru	15	360	2	20	70	Increased pressure	No visible growth
2	(MeCp)(EtCp)Ru	15	350	2	20	70	Duplicate (d) and (f) with new load of precursor and altered delivery tube	
3	(EtCp)2Ru	15	275	2	20	70	Duplicate (1) with (EtCp)2Ru precursor	
4	(EtCp)2Ru	15	350	2	10	70	Duplicate (2) with a substrate temp of 350 C	
5	(MeCp)(EtCp)Ru	15	350	2	10	70	Duplicate (1) with half the O ₂ flow NOTE: PYROMETER HAS BEEN RECALIBRATED	
6	(EtCp)2Ru	5	350	2	10	70	Same parameters as (4) using (EtCp)2Ru	
7	(MeCp)(EtCp)Ru	30	350	2	10	70	Duplicate (4) with 5 min run time	
8	(MeCp)(EtCp)Ru	5	350	20	10	70	Run a 30 min deposition with established flow settings @ min. temp., set point on susceptor initially set to 400 C	
9	(MeCp)(EtCp)Ru	5	350	20	10	70	Effect of pressure on nucleation density and growth rate	No apparent advantage
10	(MeCp)(EtCp)Ru	5/5	350	2	0/10	70	Run reactive gas (O ₂) off for first 5 min then on for 5 min to see if improve nucleation density	
11	(MeCp)(EtCp)Ru	180	348	2	10	70	First try at operating an ALD program (see sheet and notebook for details)	Appeared similar to other thin Ru films
12	(MeCp)(EtCp)Ru	12	303	20	10	70	Effect of operation @ 20 Torr chamber pressure and lower substrate temp	
13	(MeCp)(EtCp)Ru	5.17	332	2	200	70	Determine nucleation density of RuO ₂ using parameters from (c)	

Table 3, continued

Run #	Precursor	Deposition Time, min	Substrate Temperature, C	Reactor Pressure, Torr	Flow of oxygen, sccm	Vaporizer temperature, C	Purpose	Comments
14	(MeCp)(EtCp)Ru	5	361	2	10	70	Substrate treated with anthraquinone by Dave Thompson same as (6)	very rough
15	(MeCp)(EtCp)Ru	5	350	200	40	70	Perform Ru deposition at chamber pressure 2 orders of magnitude higher than previous runs (2 Torr to 200Torr) also increase O ₂ ratio as per run (13)	Film growth looks poor
16	(MeCp)(EtCp)Ru	5	334	20	200	70	Duplicate (13) with chamber pressure @ 20 Torr	
17	(MeCp)(EtCp)Ru	5	353	2	10	70	Perform Ru deposition at "ideal" temp conditions and lower carrier gas flows to reduce nozzle velocity. Chamber pressure remains 2 Torr (benchmark (6))	
18	(MeCp)(EtCp)Ru	2	354	20	10	70	Duplicate (17) @ higher chamber pressure and possibly shorter time span	Vaporizer error (250 Torr)
19	(MeCp)(EtCp)Ru	2	355	20	10	70	Repeat (17) @ 20 Torr chamber pressure and 2 min deposition time	
20	(MeCp)(EtCp)Ru	3	302	20	200	70	Thin film deposition with high O ₂ flow ruthenium oxide layer	
21	(MeCp)(EtCp)Ru	5	304	2	200	70	Duplicate (20) @ 2 Torr chamber Pressure	Good Deposition
22	(MeCp)(EtCp)Ru	5	330	2	200	70	Duplicate (13)	Deposition looks good
23	(EtCp) ₂ Ru	5	331	2	200	70	Duplicate (22) with (EtCp) ₂ Ru Precursor	
24	(MeCp)(EtCp)Ru	2	330	2	200	70	Deposit thin Ru film on pattern wafer and other substrates (Al ₂ O ₃ and SiO ₂)	Good Deposition
25	(MeCp)(EtCp)Ru	10	329	2	200	70	Deposit thick Ru film on pattern wafer	
26	(MeCp)(EtCp)Ru	120	345	2.3	10	70	ALD Ru Deposition on patterned wafer and other substrates	
27	(EtCp) ₂ Ru	5	333	2.4	200	90	Decrease sheet resistance of (23) to watch (22) by increasing the temperature of vaporizer to 90 C	Good deposition thicker/rougher in the middle of the wafer similar to 20030311A, yet slightly thinner
28	(EtCp) ₂ Ru	5	333	2.5	200	80	Duplicate (27) with vaporizer at 80C	Thick film growth
29	(MeCp)(EtCp)Ru	5	332	2.2	200	90	Duplicate (27) with (MeCp)(EtCp)Ru precursor at 90C	

Table 3, continued

Run #	Precursor	Deposition Time, min	Substrate Temperature, C	Reactor Pressure, Torr	Flow of oxygen, sccm	Vaporizer temperature, C	Purpose	Comments
30	(MeCp)(EtCp)Ru	5	331	2.2	200	80	Duplicate (29) with (MeCpEtCp)Ru precursor at 80C	similar to 20030312A, yet slightly thinner
31	(MeCp)(EtCp)Ru	10	310	2.3	200	90	Max deposition rate at lower substrate temp.	not much change
32	(MeCp)(EtCp)Ru	10	290	2.4	200	90	Continue to lower substrate temp.	Very nice deposition, thicker on the perimeter

The ALD experiment in Run 11 was conducted as follows. A patterned wafer substrate was exposed to a process gas stream containing (1) nitrogen purge; (2) nitrogen and precursor; (3) nitrogen purge; and (4) nitrogen and oxygen. The total cycle time (all 4 steps) of the experiment, run 11, was 10 seconds (3 seconds for steps 1 and 3, 2 seconds for steps 2 and 4). The process cycle (all 4 steps) was repeated 1080 times, for an overall duration of 180 minutes. The resulting film thickness was approximately 65 nm.

In Run 26, ALD was conducted in a similar manner, for a total deposition time of 120 minutes. The deposited material was not coalesced, but consisted of discrete nanocrystals ranging from 50 to 300 nm in diameter.

EXAMPLE 10

Properties of films deposited using 1-methyl,1'-ethylruthenocene were measured and were compared with those of films produced using 1,1'-diethylruthenocene.

Films were deposited on a 3-inch wafer using an apparatus such as described above. The wafer temperature was 330 °C, the precursor vaporization temperature was 70-90 °C, the chamber pressure was 2 Torr, the oxygen flow rate was 200 sccm, the nitrogen flow rate was 550 sccm, the deposition time was 5 minutes and the film growth rate was 10-60 nm/minute.

Sheet resistance was measured with four-point probe, perpendicular to major flat and 5 mm intervals (major flat=0 mm).

The results are shown in Figs. 14, 15 and 16.

Fig. 14 describes the measured sheet resistance of films deposited from (EtCp)₂Ru and (EtCp)(MeCp)Ru, as a function of vaporizer temperature. Vaporizer temperature was varied, while all other experimental conditions (temperature, pressure, etc.) were fixed. The data was measured at the center of the substrate. This figure shows that the films deposited using (EtCp)(MeCp)Ru exhibited lower sheet resistance, compared to the films deposited from (EtCp)₂Ru. This can be attributed to the higher concentration of (EtCp)(MeCp)Ru in the process gas, compared to (EtCp)₂Ru, at the

same vaporizer temperature. This difference in precursor concentration is believed to result from the difference in vapor pressure.

The wafer was cleaved and the film thickness, measured by cross-sectional SEM, is shown in Fig. 15. Under identical conditions, over the same period of time, 5 films produced from 1-methyl,1'-ethylruthenocene were thicker than the films formed employing 1,1'-diethylruthenocene. This result also was attributed to the higher vapor pressure of 1-methyl,1'-ethylruthenocene.

The resistivity of these films, shown in Fig. 16, was calculated using the measured values of sheet resistance and thickness.

10 X-ray diffraction data also was obtained and indicated that crystallites observed in SEM data were composed of Ru. In addition, X-ray photoelectron spectroscopy data was gathered as a function of depth of the film. The data indicated that oxygen was present near the surface of the films and that the amount of oxygen present in the film decreased, as one goes deeper into the film. It appeared that less oxygen was present at 15 depth in films produced using 1-methyl,1'-ethylruthenocene than in films formed from 1,1'-diethylruthenocene.

EQUIVALENTS

20 While this invention has been particularly shown and described with references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the invention encompassed by the appended claims.